


VORTEX

MALAGUTI


 VIDEO

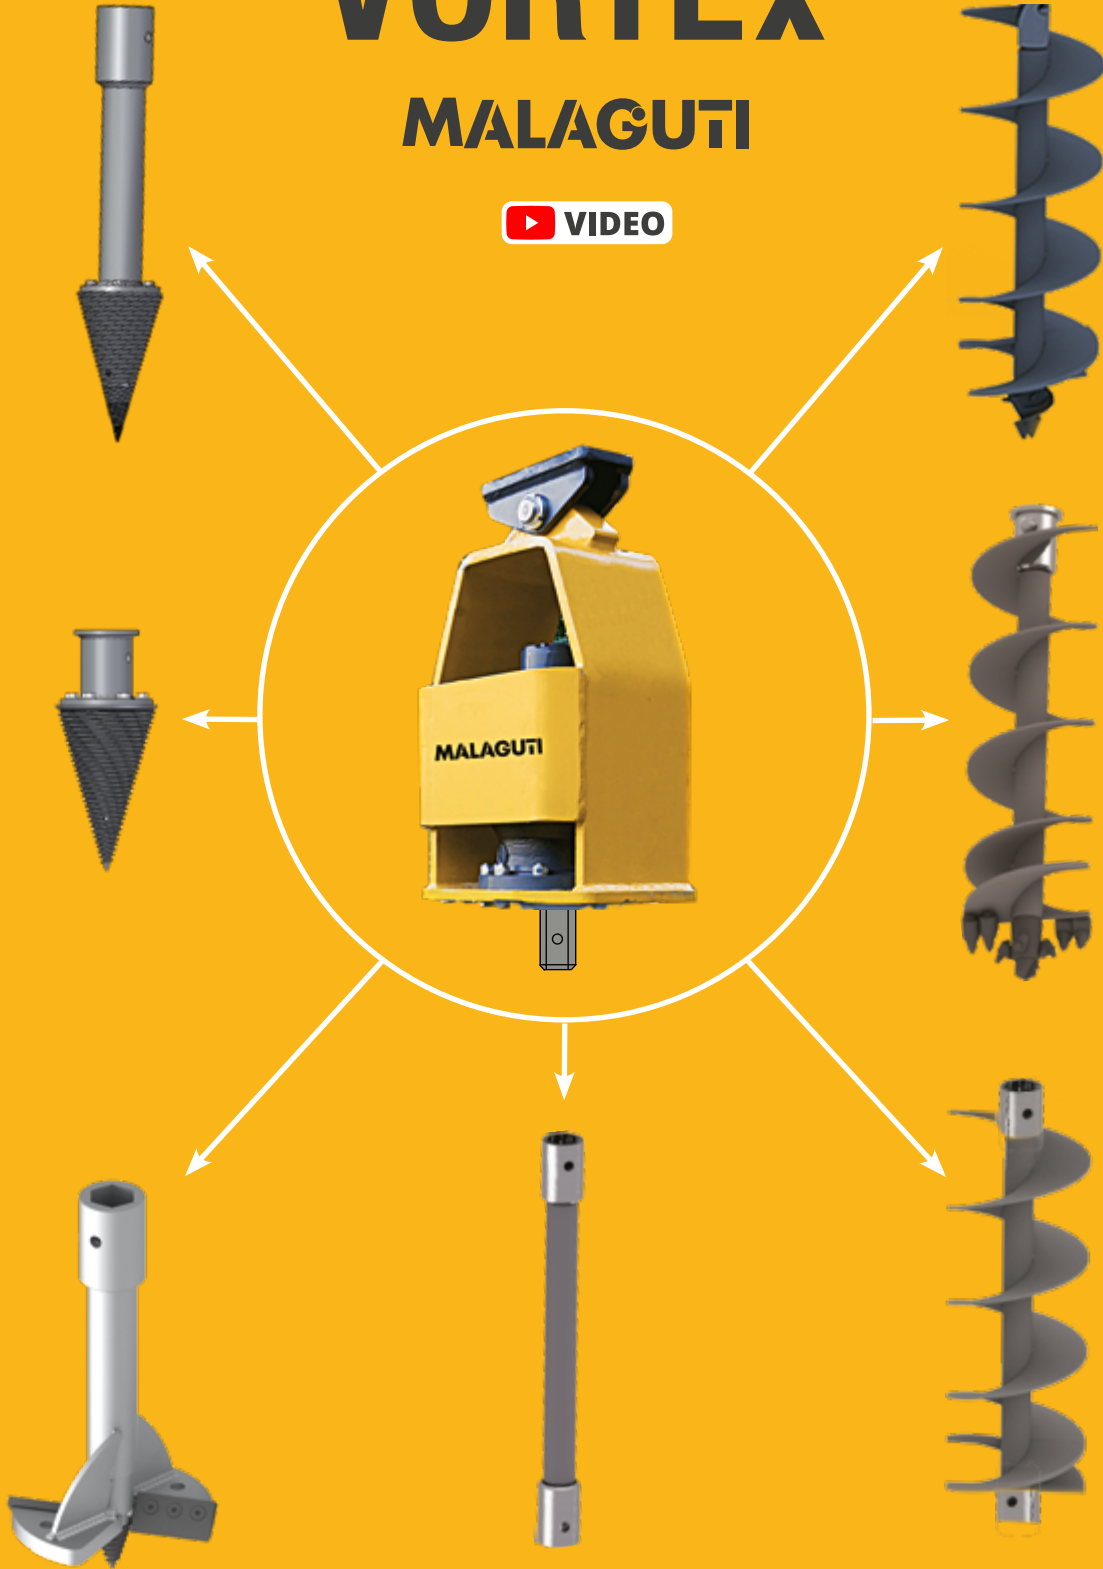

VORTEX



AUGER EXCAVATOR

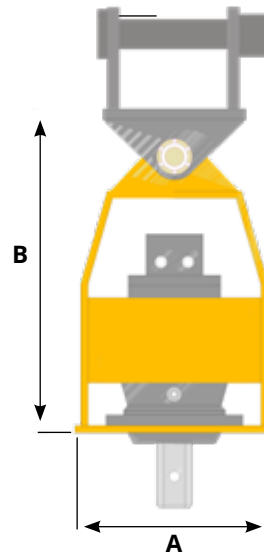

Tons	1.2 - 2.2	2.2 - 3.5	3.5 - 7.5	7 - 12	11 - 20	18-25
MODEL	M1	M2	M3	M4	M5	M6
A (mm)	280	280	350	430	620	620
B (mm)	480	480	600	780	850	1000
WRENCH	50	50	50	70	70	70
Without coupling weight Kg	80	90	150	250	300	400
Hydraulic Fluid Flow Rate (L/Min)	50	55	75	150	200	200
Pressure Bar	150	150	150	250	250	250
Torque Max. N/M	1.100	2.100	3.100	5.100	11.000	15.000
Drainage	Recommended	Recommended	Recommended	Compulsory	Compulsory	Compulsory
Price						
Flow Reverser Valve						

- The flow reverser valve makes it possible to make the hydraulic flow bidirectional enabling use of the auger even on machines with one-way system.

