


# T-DRILLING + ADAPTER

## VORBOHRER

- > Vorbohrer geeignet zum Vorbohren auf hartem Untergrund
- > Geeignet zum Vibro-Eintreiben von Beton Pfählen

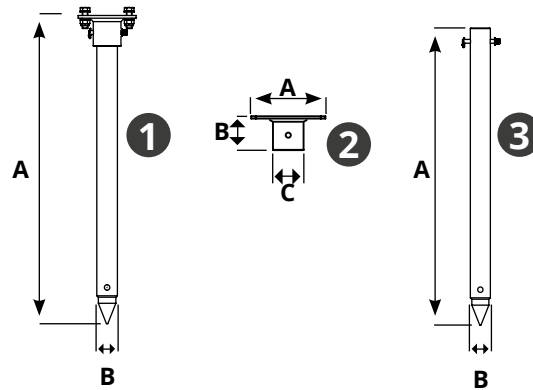

1

| Model                          | A mm | B mm  | Kg. | Model. PLURY   |
|--------------------------------|------|-------|-----|--|
| T-DRILLING + ADAPTER 1/12 ton  | 1110 | 76    | 29  | W1 9.0   W1 15.0   W1 27.0   W1 40.0                         |
| T-DRILLING + ADAPTER 8/25 ton  | 1110 | 89    | 43  | W1 65.0   W1 95.0   W2 60.0   W2 80.0<br>W2 100.0   W2 120.0 |
| T-DRILLING + ADAPTER 18/40 ton | 1130 | 101.6 | 51  | W2 150.0   W2 180.0  |

2

| Model                        | A mm | B mm | C mm Ø int. | Kg. | Model. PLURY   |
|------------------------------|------|------|-------------|-----|--|
| T-DRILLING ADAPTER 1/12 ton  | 260  | 112  | 78          | 7   | W1 9.0   W1 15.0   W1 27.0   W1 40.0                         |
| T-DRILLING ADAPTER 8/25 ton  | 265  | 145  | 90.5        | 16  | W1 65.0   W1 95.0   W2 60.0   W2 80.0<br>W2 100.0   W2 120.0 |
| T-DRILLING ADAPTER 18/40 ton | 265  | 155  | 102.5       | 19  | W2 150.0   W2 180.0  |

3

| Model                | A mm | B mm  | Kg. | Model. PLURY   |
|----------------------|------|-------|-----|--|
| T-DRILLING 1/12 ton  | 1095 | 76    | 22  | W1 9.0   W1 15.0   W1 27.0   W1 40.0                         |
| T-DRILLING 8/25 ton  | 1095 | 89    | 27  | W1 65.0   W1 95.0   W2 60.0   W2 80.0<br>W2 100.0   W2 120.0 |
| T-DRILLING 18/40 ton | 1095 | 101.6 | 32  | W2 150.0   W2 180.0  |

