





ROLLER VIBRATING ROLLER COMPACTOR

GREAT COMPACTION FORCE


SUITABLE FOR ROAD WORKS AND CONSTRUCTION OF PAVINGS AND CYCLE PATHS, IT GUARANTEES A SOLID AND HOMOGENEOUS BASE

AVAILABLE IN FOUR WIDTHS

THE VIBRATING SINGLE ROLLER IS AVAILABLE IN FOUR WIDTHS AND INCLUDES FRONT ATTACHMENT

ROLLER



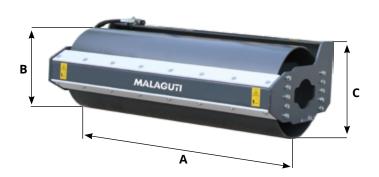

ROLLER	MR160	MR170	MR180	MR200
A (mm)	1600	1700	1800	2000
B (mm)	600	600	600	600
C (mm)	700	700	700	700
Hydraulic Fluid Flow Rate (L/Min)	45	45	45	45
Without coupling weight Kg	620	660	700	800
Vibration rate (RPM)	2000	2000	2000	2000
Centrifugal Force (Kn)	15	15	15	15





MALAGUTI EARTHMOVING EQUIPMENT

Officine Malaguti SRL Sant'Agata Bolognese (BO) Italy

Ufficio Commerciale

- ← +39 0547 1932186☑ commerciale@malagutisrl.com
- Piazza Plauto, 40 47027 Sarsina (FC) Italy
- www.malagutisrl.com

